

# N8

## SS9483SCM

N8 is a 650W LED Moving head,with beam,framing,spot,washing all in one. On the basis of the original N7, the newly upgraded optical Angle is 6°-50° ,illumiance up to 11,3000 lux at 5 meters on the minimum angle. The tilt movement speed is increased to 1.5 seconds per Round, with NFC can connect the fixture quickly and set the basic function very easily by the YJNFC app, the linear CMYK color mixing system provides rich color saturation, the adjustable linear CTO color temperature, and the professional framing system can cut out any sharp projection. Dynamic animation wheel can be created with water and fire effects. Designed to provide the best choice for venues such as theater, TV stations, concerts and rental shows.



### PRODUCT PARAMETERS

#### Optical system

Light source 650W  
Angle 6°-50°

illumiance 5m@11,3000lux

#### Appearance

Size 416x364x728mm  
Weight 34KG  
Casing Flame-retardant plastic (VO), Die-cast aluminum  
Color black

#### Electrical Specs

Voltage 100-240VAC  
Max.Power 800W  
Power Connection 3pin or 5 pin in and out,RJ45 in and out  
Signal socket 3pin or 5 pin in and out,RJ45 in and out

#### Control System

Pan/Tilt rotation 540°/270°(8-16bit)  
Dimmer 0-100% 16Bit  
Cooling Direct Convection  
Control DMX/RDM/ARTNET/SACN/W-DMX(Optional),webserver

Display On Board Control,0-25Hz Strobe

Con Personality BASIC/35CHS、STANDARD/41CHS,Extend/44CHS

#### Effect synthetic system

Rotating Gobo 7 Gobos+ White,Gobo-flow effect, Gobo shake,Bi-directional rotation

Static Gobo 10 + 1 Gobos  
Animation Wheel 1 animation wheel

CMYK One color wheel(6 dichroic-filters+White,Rainbow-flow effect)  
Colors

Prism One piece of 4 F prism with bi-direction rotation, Speed adjustable

Iris 5-100% linearly adjustable with macro

Zoom Motorized linear Zoom  
Focus Motorized linear focus

Frost (light+medium) 2Frost filter

Framing system 4 shutter blade, Each blade's angel and direction can be individual controlled, fully blackout; The whole Framing module is ±45°

#### Work Environment

Ambient Temp -20°C-45°C



IP Rated IP66

#### Certification

CE

### ILLUMINANCE AT DISTANCE

#### SS9483SCM

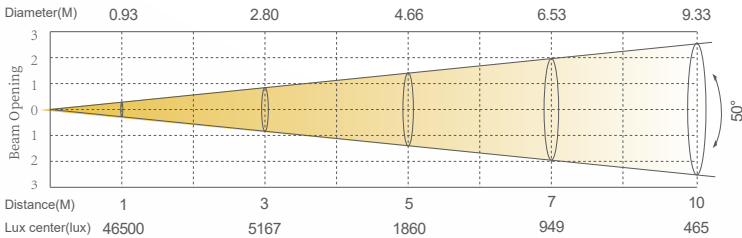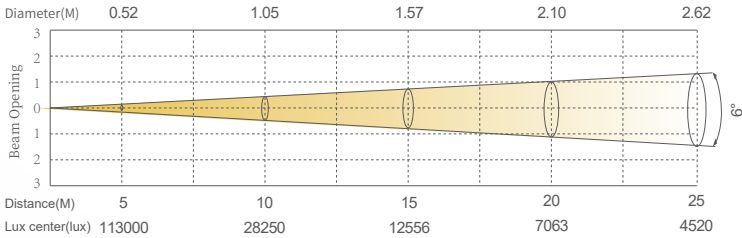

#### FIXED GOBO



#### Colors




#### Rotation Gobo



#### CMY+CTO




#### Framing system




#### Animation Wheel



### DIMENSIONS

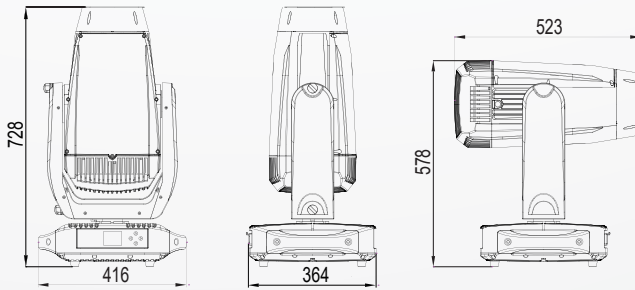

### ACCESSORIES (Accessories not included unless otherwise stated)



Flight case  
(1320400259)

Wireless receiving module  
(2440010465)