

N15

SS680SCM

NEPTUNE 1500 PROFILE is a high power LED moving spot + profile, with the super efficient optic system, 1:7 times zoom 7-50°, the Max.output is 71000lx @ 5m;It is a kind of final version stage light , accurate and efficient motor can provide not only large pan angle and tilt angles but also with smooth and high speed.NEPTUNE 1500 PROFILE has image-cuttingsystem can cut out any polygon, and with zoom, focus, prism, color wheel, CMY, gobo wheels, iris, frost can supply high-quality beam colors and gobos. NEPTUNE 1500 PROFILE is equipped with animation wheel which can create dynamic water and dynamic fire effect.NEPTUNE 1500 PROFILE is designed for the cultural center, function hall, banquet hall, and rental performance market.



PRODUCT PARAMETERS

Optical system

Light source	Luminous flux	Angle
1000W module	32388lm	7°-50°

Appearance

Size	500x364x846mm		
Casing	Flame-retardant plastic (V0)	Die-cast aluminum	
Weight	57kg	Color	Black

Electrical Specs

Voltage	100-240VAC,50/60Hz		
Signal socket	3pin or 5pin in and out, RJ45 in and out		
Power Connection	power in	Max. Power	1300W
Control System			
Pan/Tilt rotation	540°/270°(8-16bit)		
Dimmer	0-100%16Bit	Cooling	Forced Convection
Control	DMX512, RDM, ARTNET, SACN, W-DMX (optional), Web Server		
Con Personality	BASIC(29CHS), STANDARD(38CHS), Extend(43CHS)		
Display	On board Control, Custom Mode,0-25Hz Strobe		

Special	Pan/Tilt movement blackout,User-selectable pan/tilt ranges, gravitation sensor for auto screen positioning
---------	--

Effect synthetic system

Rotating Gobo	7 Gobos+ White, Gobo-flow effect, Gobo shake, Bi-directional rotation		
Static Gobo	8 Gobos+White, Gobo-flow effect, Gobo shake		
Colors	One color wheel(6 colors + White, Rainbow-flow effect)		
CMYK	CMY wheel, Linear CTO function		
Prism	1pc 5F prism, 1pc linear prism		
Framing system	4 shutter blade; Each blade's angel and direction can be individual controlled, fully blackout; The whole Framing module is ±45°.		
Animation Wheel	Bi-directional rotation,Speed adjustable		
Iris	5-100% linearly adjustable with macro		
Focus	Zoom	Frost	
Motorized linear focus	Motorized linear Zoom	1 Frost filter	

Work Environment


Ambient Temp
-20°C-45°C

IP Rated
IP66

Certification

CE

ILLUMINANCE AT DISTANCE SS680SCM

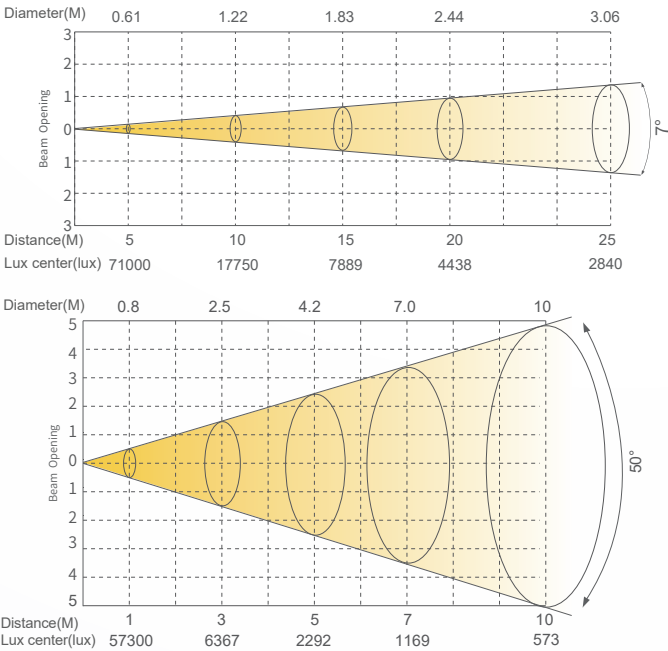

FIXED GOBO



Colors



Rotation Gobo



Animation Wheel




CMY+CTO




Animation Wheel



DIMENSIONS

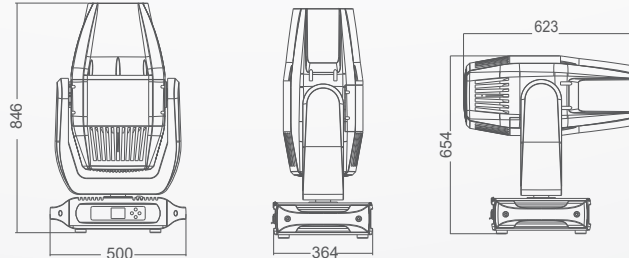

ACCESSORIES (Accessories not included unless otherwise stated)



Flight Case
(1320400206)

Wireless receiver Kit
(2440010666)