

KF1

KOLORMAX KF1, use of lightweight aviation aluminum, energy saving design, the weight of the whole fixture only 5.9kg, green lighting energy consumption ratio of 957lm/kg, high-efficiency power 4-in-1 RGBL LED chip, with a new heat dissipation distribution structure, to ensure that LED in high-intensity operation stable and reliable, durable. Unique high-end optical design, easily get an accurate mixed single color or multi-color, and the light efficiency up to 63lm/w, leading the new concept of lighting energy saving. It has a variety of lens angles options, suitable for landscape, commercial building, pedestrian street and other scenes. KOLORMAX KF1, low power consumption and high energy efficiency, the ideal choice for architectural floodlight.



TECHNICAL PARAMETER

Product code: AM725KXLET

Max. Power: 100W

Light source: 4 in 1 RGBL

Luminous Flux: 6317lm

Peak Intensity: 23321cd(15°)

CRI: Ra: 85

CTO: 1800K-10000K

Built-in colors: 24 preset colors

Con Personality: DMX512, RDM

Operating voltage: AC220V-50/60Hz


Working Temperature: -20°C~45°C

Protection Level: IP67

Dimensions (L*W*H): 305*70*301mm

weight: 5.9kg


ANGLE

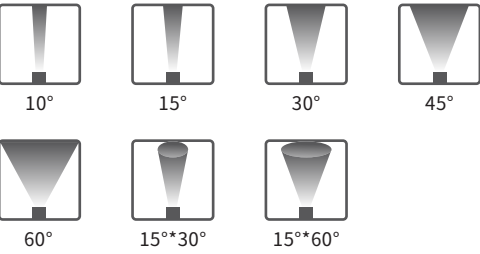

SPECIFICATIONS




DIMENSIONAL DRAWING



OPTIONAL ACCESSORIES

LIGHT DISTRIBUTION DIAGRAM (★ THE ABOVE COLOR TEMPERATURES ARE ACHIEVED BY YAJIANG DIGITAL COLOR TECHNOLOGY AND CCS TECHNOLOGY)

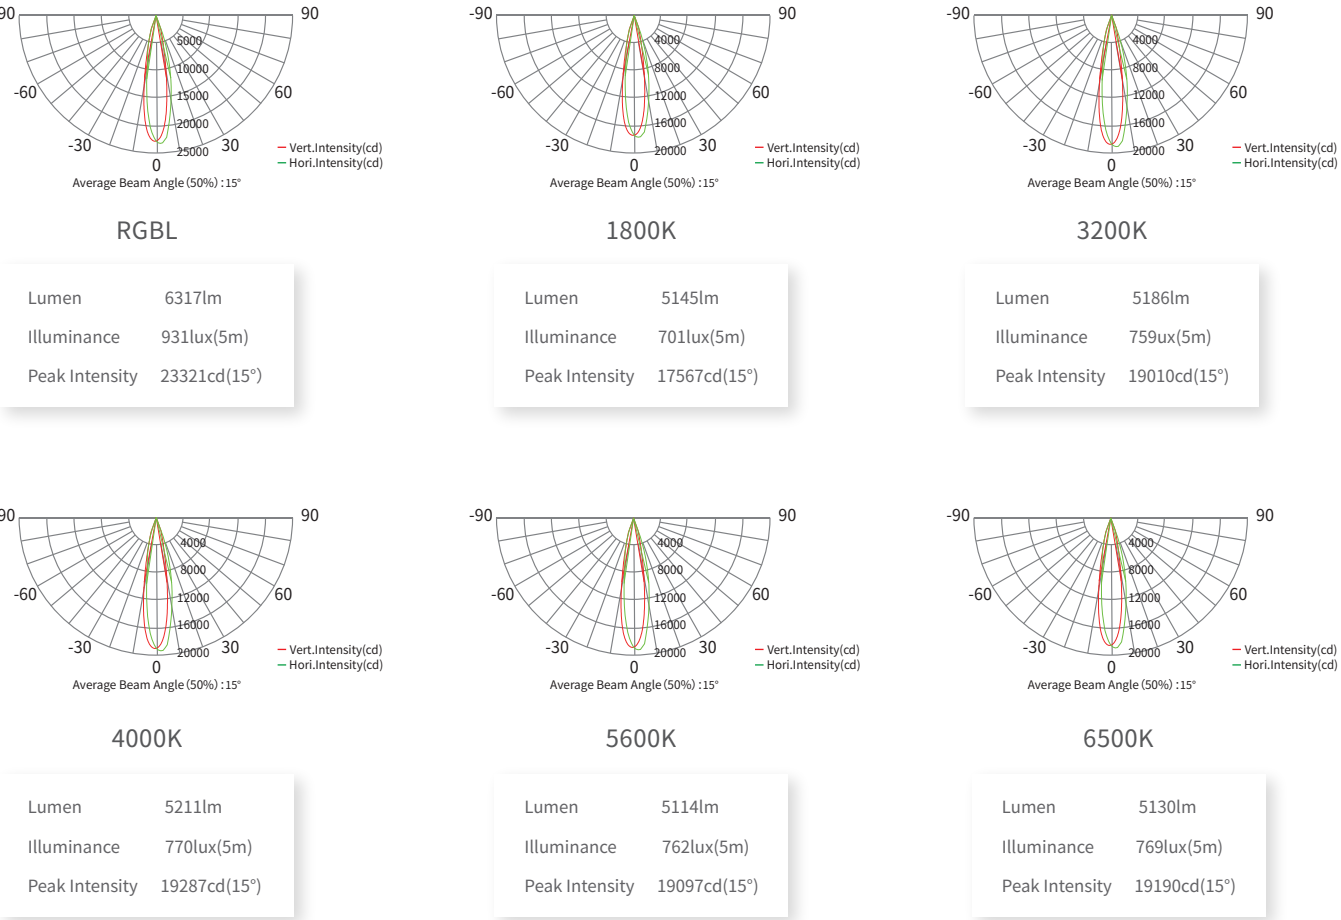

ILLUMINANCE AT DISTANCE

